


Floating Dock EasyFloat



AN EASYFLOAT FLOATING DOCK IS PERFECTLY SUITED FOR APPLICATIONS WHERE BEIGN LOW ON WATER IS ESSENTIAL. THANKS TO ITS HEIGHT OF 21CM, IT IS OFTEN USED IN APPLICATIONS SUCH AS ROWING, CANOEING, ETC.

We offer **9 standard models** of floating dock sections in widths of **1,20m**, **2,40m** or **3,60m** and length of **3,00m**, **4,20m** or **6,00m**.

Easy to assemble, the EasyFloat sections allow achieving **any desired configuration**.

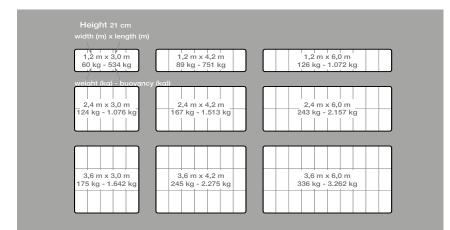

Most of our customers install their floating dock by themselves, however we offer an installation service by certified technicians.



An Easyfloat floating dock is a set of floatation units measuring **0,60 m x 1,20 m**, with a **thickness of 21cm**, integrated into a frame made of **4 aluminum profiles** connected by polypropylene corner pieces. The floatation units are made from UV stabilized impact resistant plastic filled with expanded polystyrene and sealed, which means they are not affected by water and other external factors. Easy Float only uses stainless steel fittings, making it a solid structure with a **long life span**.









>>> LOW ON WATER

With a height of less than **21cm** and a buoyancy of **150kg / m²**, our Easyfloat floating docks are particularly suitable where being **as low as possible** on the water is essential.

EASY INSTALLATION

The assembly of the Easyfloat floating docks is realized by **means of hinges** very easy to implement, **without using special tools**.

The aluminum **profile type C** on the periphery of each section of Easyfloat floating dock makes it easy to fasten all types of **accessories**, **anchors**, **gangways** or **railings**, standard or custom made.

SECTORS OF ACTIVITY

The modularity of our EasyFloat sections allows them to adapt to various water bodies in many sectors of activity : water sports and recreation, maintenance works, floating bathing platform, tourism and event applications, etc. Whatever your project, you can trust the versatility of our sections to meet your most precise needs.



Water sports



Recreation



Maintenance works

ANCHORING

Our EasyFloat floating docks can be anchored in different ways. In all cases, the type and number of anchors will be determined by the constraints of the size of the pontoon, the type of body of water (sea, river, lake), the environment in which it will be located (port, beach, arm of river, closed basin, etc.), the type of boat it will welcome, machine it will have to support, current and winds it will have to resist, etc.

For each type of anchor, we have developed specific accessories ensuring greater efficiency.

Anchoring on poles





Pole bracket



Pole hammer

Anchoring by chain or rope





Deadweight bracket made of stainless steel

Anchoring to the shore or wharf





Stiff-arm



Aluminum gangways

Anchoring on H-Beam Bracket








H-Beam Bracket

GANGWAYS AND RAILINGS

To provide access to your EasyFloat floating dock, we offer a range of standard aluminum gangways, but we can also make custom. We also offer aluminum railings.

Aluminum gangways

Aluminum railings

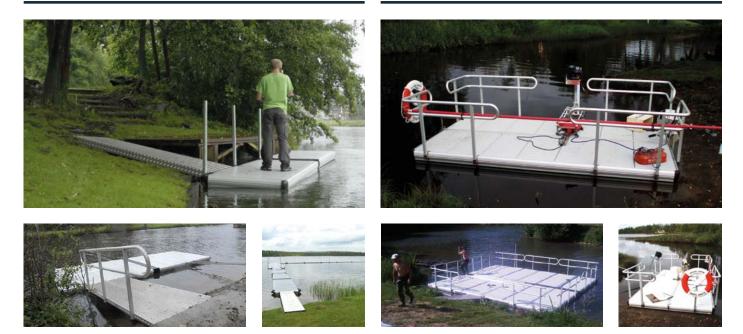

ACCESSORIES

The C aluminum profile on the periphery of each section of pontoon allows attachment of a series of accessories, standards such as those we propose here (fenders, mooring ring, ladder, etc.) or custom made by us or yourself.



Swimm ladder



Roll for launching



Mooring ring

Fender profile

 \bigcirc



Stainless steel cleat



Engine holder



dock marine 📞 🕹

+ 32 (0) 4 226 60 07 + 32 (0) 470 03 77 69 Rue de la Brasserie 8 bte 4 4000 Liège (Belgium)

k info@ wwv

info@dockmarine-europe.com www.dockmarine-europe.com